

# **UM88T-19L**

**Dual-tone**

**Melody**

## **Generator**

---

### **Features**

- 127-note ROM memory
- Sound range : 2.5 octives, 2 series
- Termpo : 16 kinds (presto-largo) note
- Double sound sources
- Digital envelop effect
- 1.3V to 3.3V operating voltage
- Built-in RC oscillator
  - Power-on reset, melody begins from 1<sup>st</sup> note
- With external npn transistor to drive speaker
- Packaged in inexpensive TO-92 package

### **General Description**

The UM88T series is a CMOS LSI designed melody generator IC with accompaniment for use in telephones and toys application. It has an on-chip ROM programmed for dual-tone musical performance. Produced by CMOS technology, the device results in very low power consumption. And with built-in RC oscillator, a compact melody module can be constructed with only a few additional components.

### **Electrical Characteristics**

(Vss=0V, Vdd=1.5V, Ta=25°C, unless otherwise specified.)


Parameter	Symbol	Min.	Typ.	Max.	Conditions
Operating voltage	VDD	1.3V	1.5V	3.3V	
Current Consumption	IDD	-	-	1mA	Playing with no load
Output Current	IO/P	0.6mA	1.5mA	-	

### **Song Series List**

Part number	Song name
UM88T-19L	For Alice


### Pin Configuration (Front View)

Pin no.	Symbol	Description
1	O/P	Melody Output
2	VDD	Positive Power Supply
3	VSS	Negative Power Supply

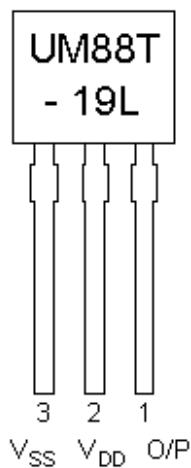

### Typical Application Circuits

LEVEL HOLD MODE FOR SPEAKER      LEVEL HOLD MODE FOR PIEZO BUZZER

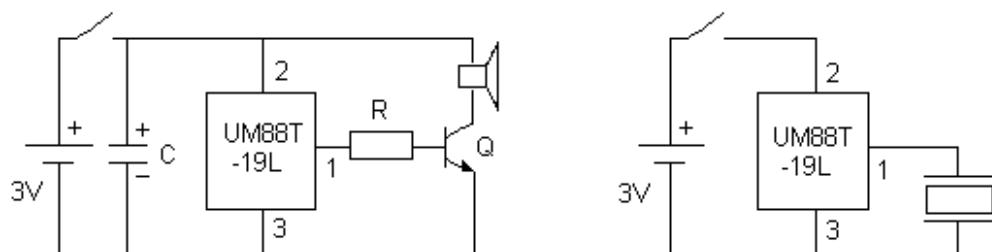

Recommended values : C = 1 $\mu$ F , R = 4.7K $\Omega$  , Q = 2SC9013

REV.9-01 (2 pages)